

GMR2

Induct-Sinusoidal Encoder



GMR2/GMRC-200 series is a high-resolution robust linear encoder of which structure is simplified and can enjoy heat-resistant 120°C.

Succeeding to GMR sensor principle of operation, sleeve dia has now widened $\phi 18\text{mm}$ and offering more robust structure.

Detecting absolute position of each sleeve pair within one pitch of 51.2mm and incremental position over one pitch by counting pitches. GMR2 series are the semi-absolute linear encoder of 24 bits integrated data of one pitch absolute and pitch count.

SC type has now been added making cable duct mount possible.

Specifications

◆ Sensor

Effective stroke	25.6mm~1996.8mm	
Absolute sensing	51.2mm	
Accuracy	0.15mm+0.01mm × (stroke/51.2)	
Operating temp	-20°C~+120°C	
Storage temp	-40°C~+130°C	
Operating humidity	10~100%RH	
Vibration	20G (10~150Hz) direction XYZ	
Shock	100G 6ms direction XYZ	
Admissible pressure	35MPa (probe)	
Oil proof	mineral oil, water-glycol phosphoric acid ester, fatty acid ester	
Protection	IP67 (10kPa, 30min)	
Cable (max)	genuine	200m
	KPEV-S	100m

◆ Controller

Output	Open collector photo isolate
Resolution	0.00625mm
Positional output	24bit (13bit absolute+11bit pitch count)
Output Code	Binary or Gray
Sample rate	5kHz / 2.5kHz / 1.25kHz / 0.625kHz
Power supply	DC 22~30V
Consumption	< 8W (DC24V 0.3A)
Operating temp	-20°C~+65°C
Storage temp	-40°C~+75°C
Operating humidity	10~90%RH (no-condense)
Vibration	2G (10~150Hz)
Shock	50G (11ms)
Dielectric withstand voltage	AC500V @ 1 minute
Insulation resistance	≥ 10MΩ with 500VDC
Protection	IP30
Dimensions	50W × 270H × 140D (connector not included)

(Note) Output code and sample rate are configurable at user side by switch integrated.

Features

- extremely high resistant to harsh circumstances due to no electronic parts employed in the sensor
- integrated into hydraulic cylinder and can be used for equipment of such as steel-mill plant
- no wear-out expected since no mechanical contact between sensor-rod and sleeve
- resolution 6.25 μm of absolute output, in addition incremental output is prepared.

Models

◆ Sensor

GMR2-SC5R- -Z -G (SC type)
 ① ② ③ ④ ⑤

GMR2- -Z -G
 ① ③ ④ ⑤

- ① sleeve dia $\phi 18$ type
- ② cable duct mount type (cable direction radial)
- ③ stroke (unit 0.1mm, multiple of 25.6)
- ④ Z dimension (unit 0.1mm)
- ⑤ cable length (unit 1m)

◆ Controller


GMRC-201SC- - (SC type)
 ① ② ③ ④ ⑤

GMRC-2 - -
 ① ② ④ ⑤


- ① GMR2 controller
- ② output 01:parallel 02:parallel/incremental
- ③ for SC5R type sensor
- ④ resolution UF:6.25 μm
- ⑤ code B:binary G:gray

Dimensions


◆GMR2-SCR5 sensor

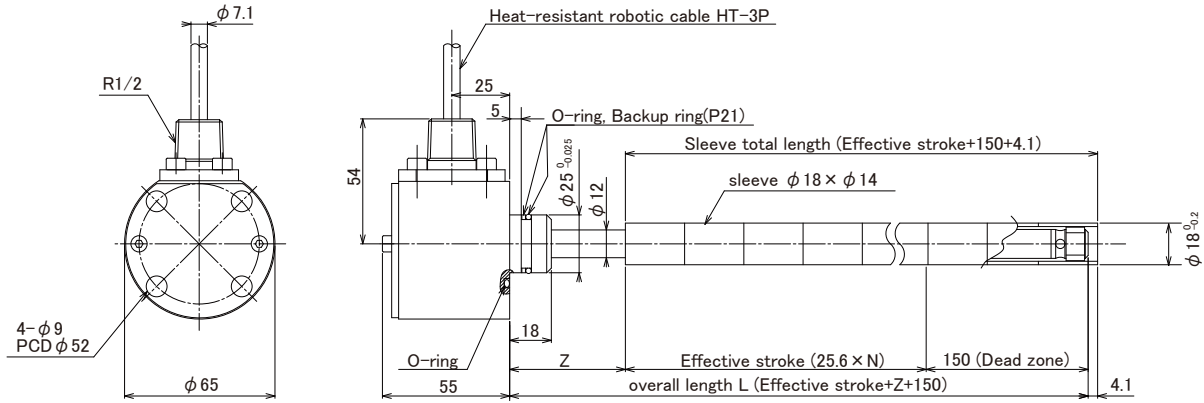

◆GMR2 sensor

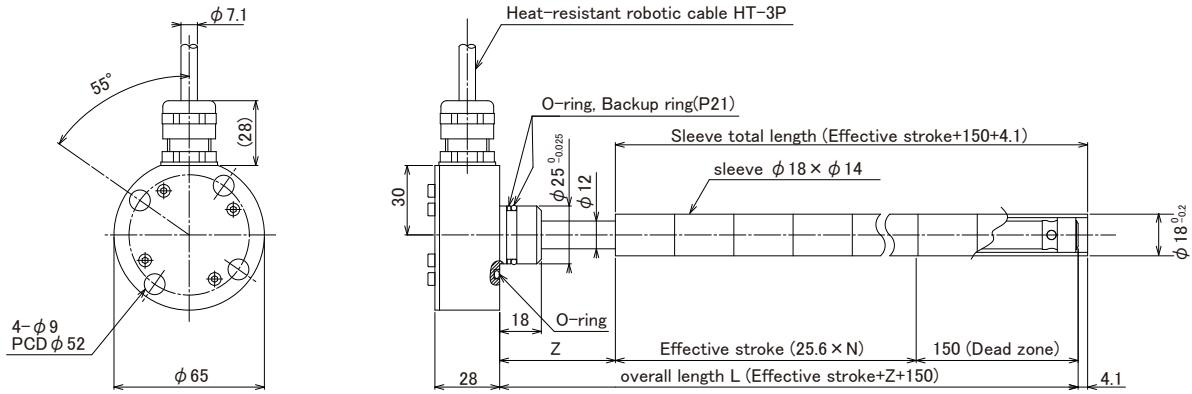

◆GMRC controller (SC type is also same shape)

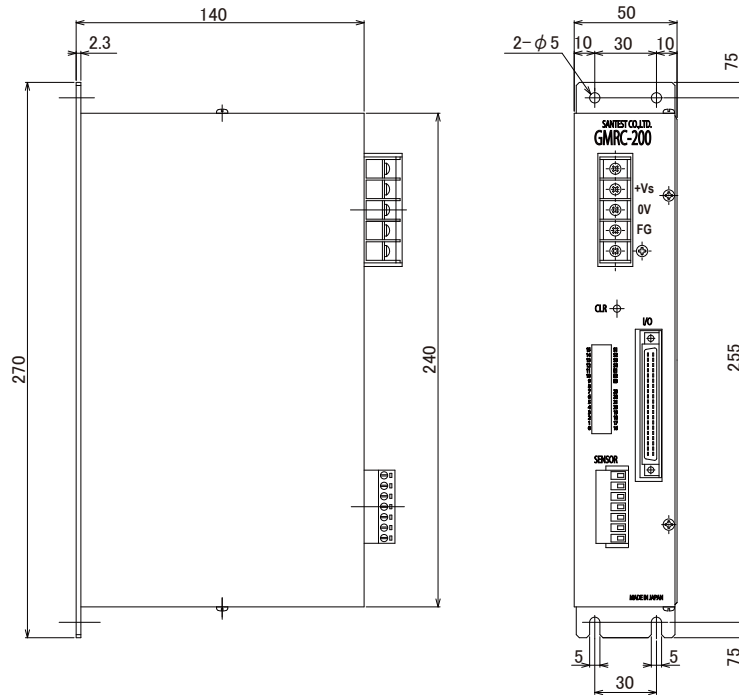

It makes Technological Sense
SANTEST CO., LTD.

Head Office 2-51, Shimaya 4-Chome, Konohana-ku,
 Osaka, 554-8691, Japan
 Phone: 06(6465)5561 Fax: 06(6465)5921
 Tokyo Office Phone: 03(3432)1417 Fax: 03(3432)1337
<http://www.santest.co.jp>